


DIN 3118

• Bocche aperte per la manovra di raccordi di impianti idraulici, oleodinamici ed aria compressa.

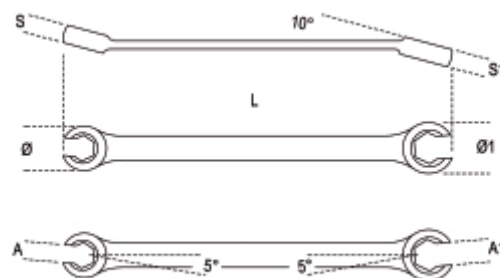

art.	mm	L mm	Ø mm	Ø1 mm	A mm	A1 mm	S mm	S1 mm	g
000940008	8x10	140	17,8	19,3	6,0	7,0	6,5	7,5	40
000940009	9x11	153	19,4	21,4	7,0	9,0	8,0	8,5	49
000940010	10x11	153	19,4	21,4	7,0	9,0	8,0	8,5	70
000940011	11x13	175	21,4	23,5	9,0	8,5	8,5	10,5	80
000940012	12x14	175	22,8	25,3	9,0	11,0	8,5	10,5	78
000940014	14x15	175	25,5	27,3	11,0	12,0	10,5	11,0	130
000940015	14x17	195	27,4	31,4	11,0	14,0	11,0	12,5	140
000940017	17x19	212	31,2	33,3	14,0	15,0	12,0	13,0	174
000940019	19x22	228	33,5	38,5	15,0	17,0	13,0	14,0	220
000940022	22x24	242	38,5	42,0	17,0	18,0	15,0	16,0	314
000940024	24x27	260	46,6	46,6	18,0	20,0	16,0	17,0	411
000940030	30x32	300	50,6	52,6	22,0	24,0	19,0	20,5	672
000940036	36x41	320	61,0	67,5	25,5	32,5	24,5	25,4	772